



FLOTRONIC® ONE-NUT™ AODD PUMP

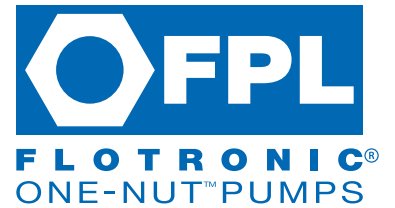

BENEFITS INCLUDE


- **Standard finish of 32µin Ra or better** on wetted surfaces with an electro-polished overall finish to aid pump cleaning
- **'Clean in Place' design** that includes either a pump inversion stand or modified seats for draining
- 7", 10", and 12" versions all with **3-A SSI accreditation**
- **Diaphragm rupture detection system** with instant pump shut-down alarm facility to keep product contamination-free
- **BS, DIN, and ISO hygienic connection options** ensuring that hygiene standards are not compromised
- **'ONE-NUT' technology** for ease of maintenance
- Option of **reinforced diaphragms**

Flotronic H-Series Air Operated Double Diaphragm Pump parts and raw materials are of the highest quality with their provenance duly certified. Product contact areas are either PTFE or 316L Stainless Steel, with stainless product contact areas polished to 32µin Ra maximum. Cleanability is further enhanced by an electro-polished overall finish.

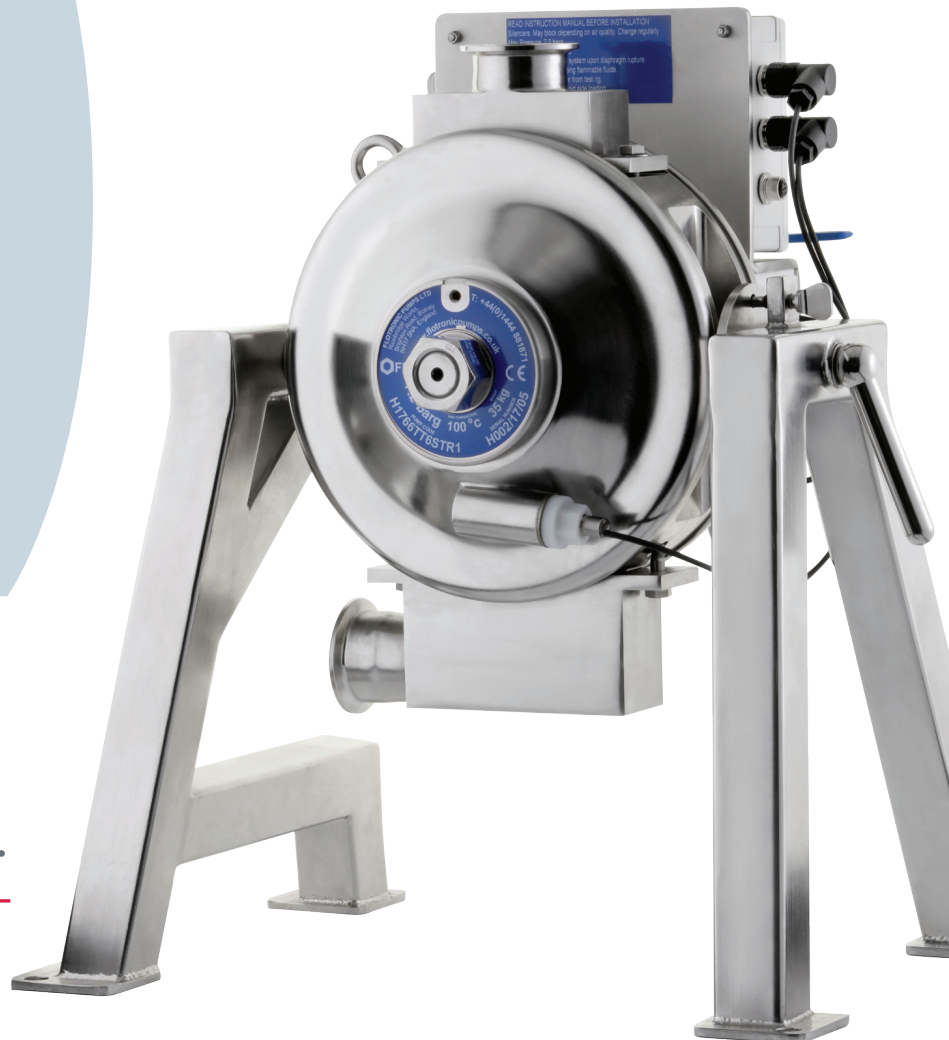

When it counts,
count on Unibloc® Pump.



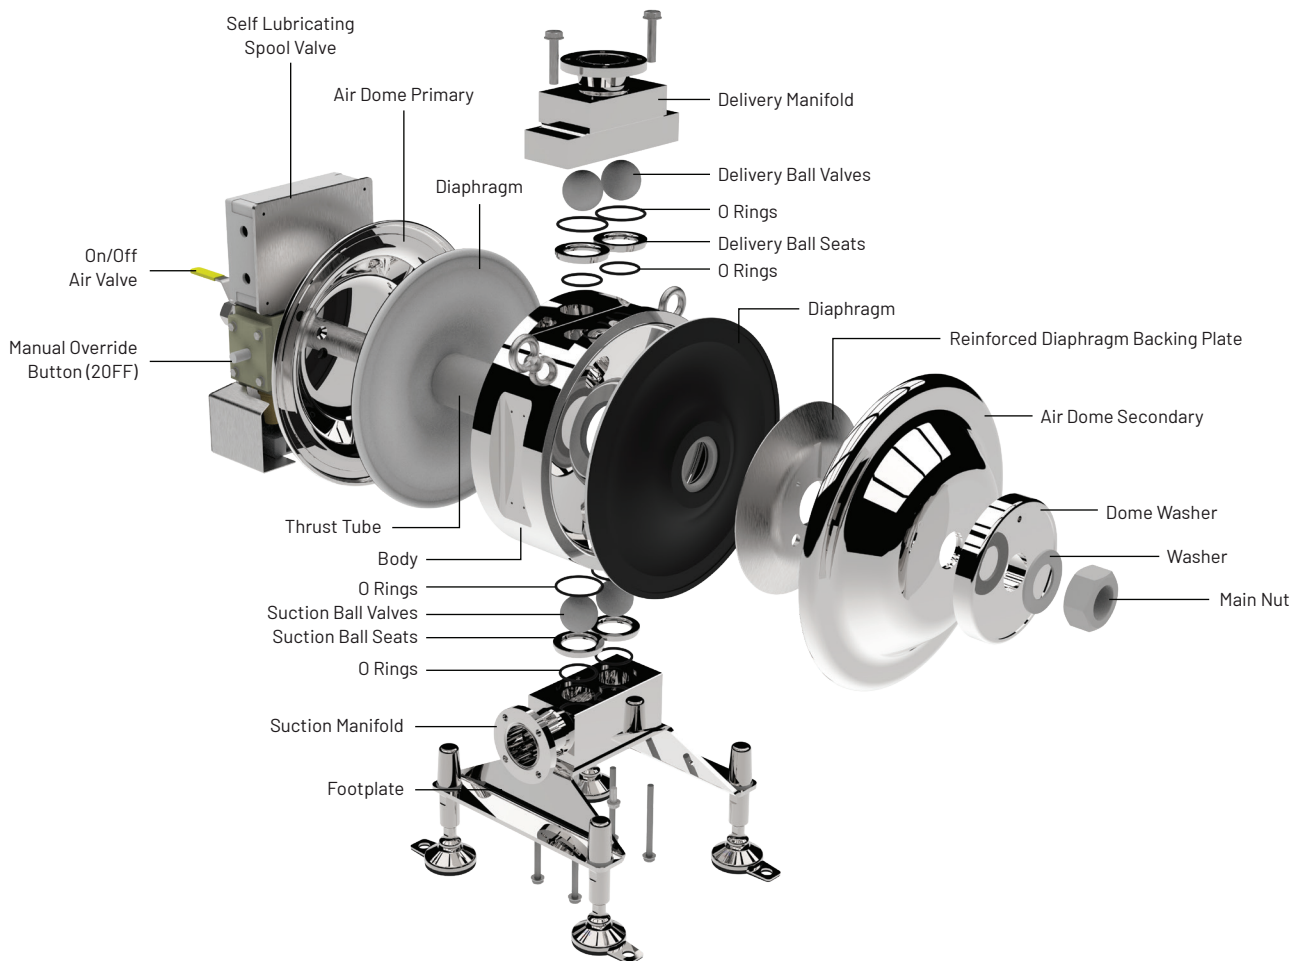

HIGH QUALITY MATERIALS THROUGHOUT

H-Series pump parts and raw materials are of the highest quality with their provenance duly certified. Product contact areas are either PTFE or 316L Stainless Steel, with stainless product contact areas polished to 32µm Ra maximum. Cleanability is further enhanced by an electro-polished overall finish.

REINFORCED DIAPHRAGM OPTION

Unique to Flotronic, the H-Series pump can be fitted with diaphragms which are reinforced. Reinforcing plates add support to the diaphragms and ensure that the pumps can withstand CIP/SIP pressures of up to 6 bar in the suction line. This means the pumps can be Cleaned in Place using fully automated CIP units incorporating external CIP pumps, without the need to bypass the pump.

RUPTURE DETECTION SYSTEM

Operator peace of mind is naturally critical in environments where product contamination is to be avoided at all costs. That's why all H-Series pumps have an integral diaphragm rupture detection system. This shuts down the pump should a diaphragm fail, so product is not compromised.

CONNECTIONS

All H-Series pumps are available with the option of BS, DIN, or ISO hygienic connections.



Unibloc-Pump, LLC

1650 Airport Road Suite 110
Kennesaw, GA 30144
sales@uniblocpump.com
770-218-8900

Ricebridge Works • Brighton Road
Bolney, West Sussex RH17 5NA • United Kingdom
sales@flotronicpumps.co.uk
011-44(0)144 488 1871